

FIG. 1

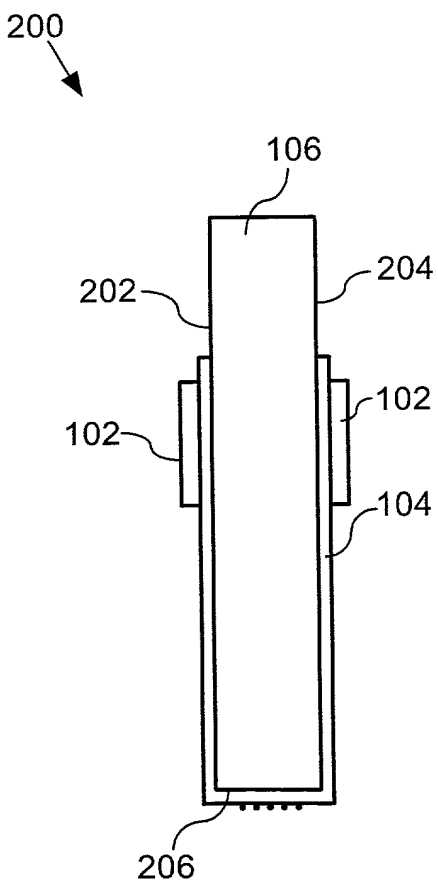


FIG. 2

A cross-sectional view of a device assembly. A central component 102 is shown with a top and bottom flange. It is surrounded by a rectangular frame 104. A large rectangular block 106 is positioned behind the frame. A series of vertical lines 108 pass through the central component 102. A series of dots 110 are arranged in a grid pattern on the central component 102. A series of dots 112 are arranged in a grid pattern on the frame 104.

FIG. 3

400

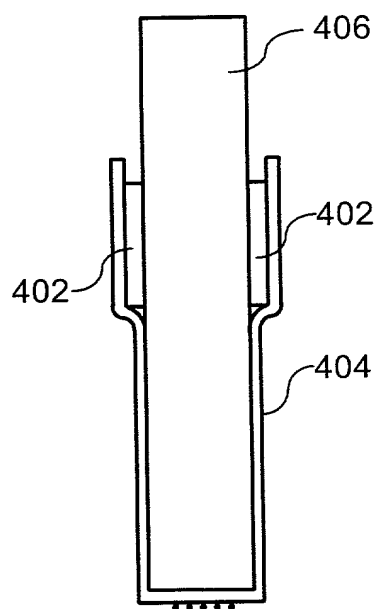


FIG. 4

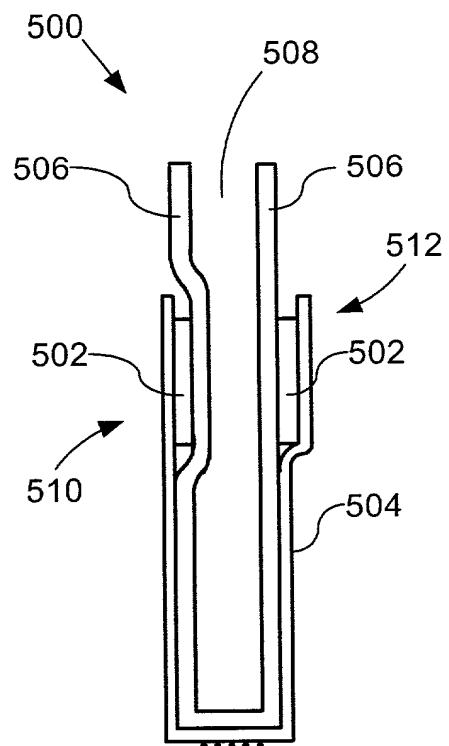


FIG. 5

600

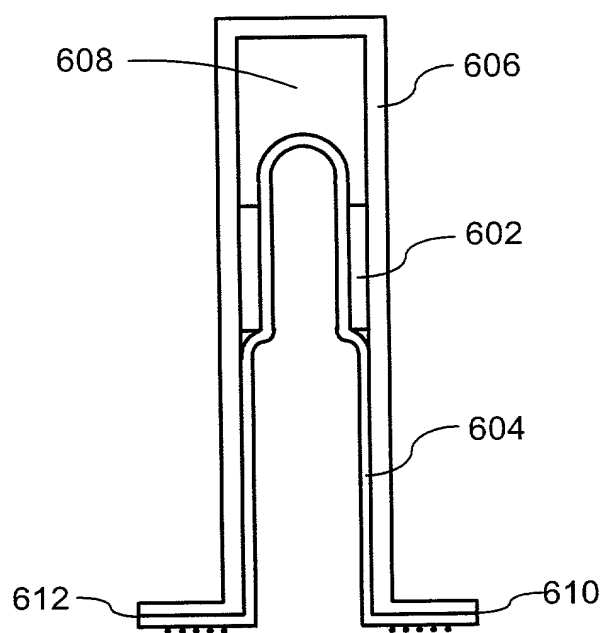


FIG. 6

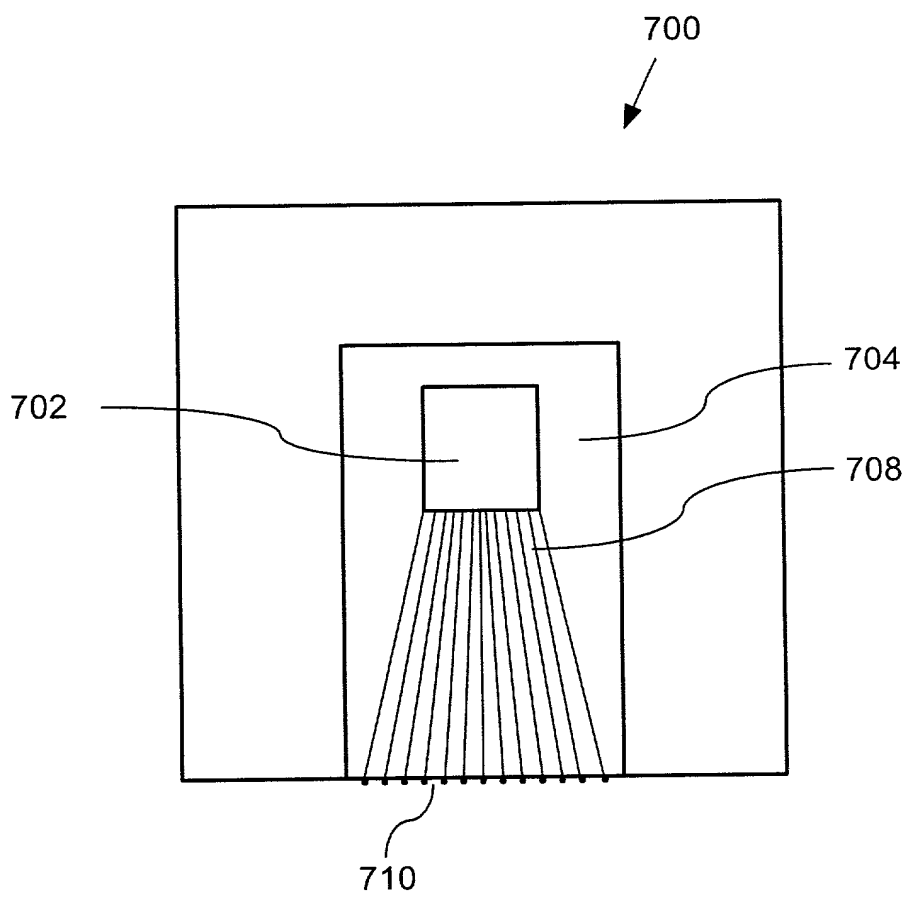


FIG. 7

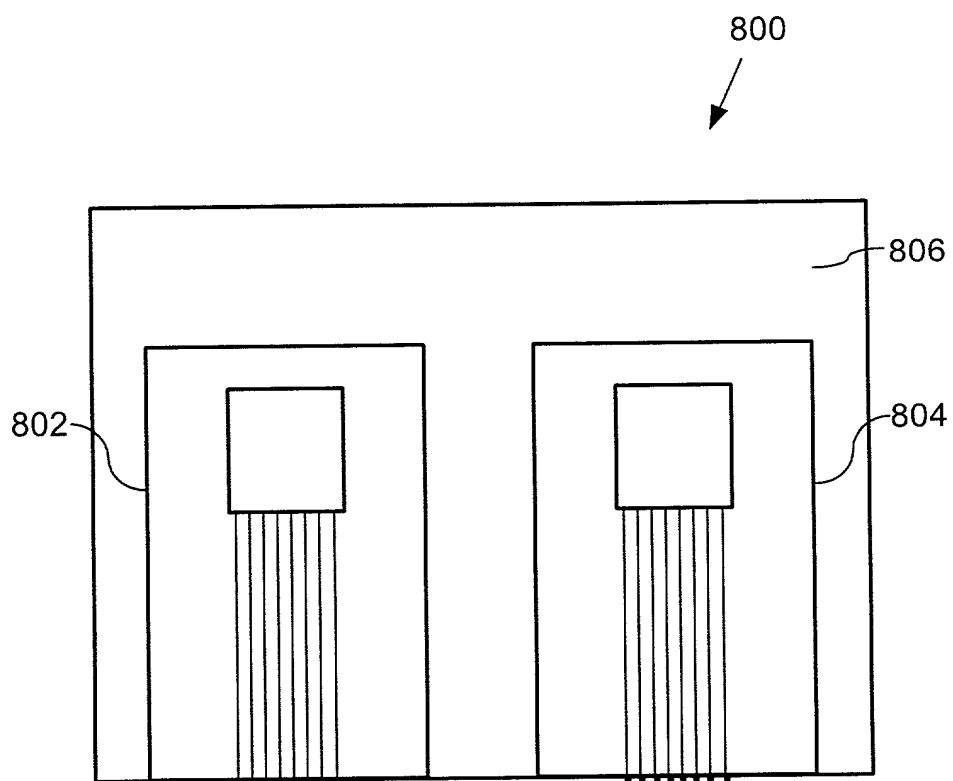


FIG. 8

1000

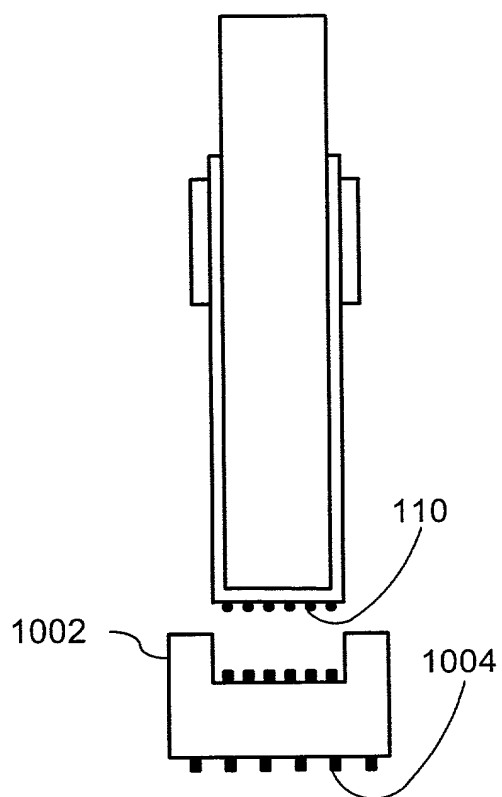


FIG. 10

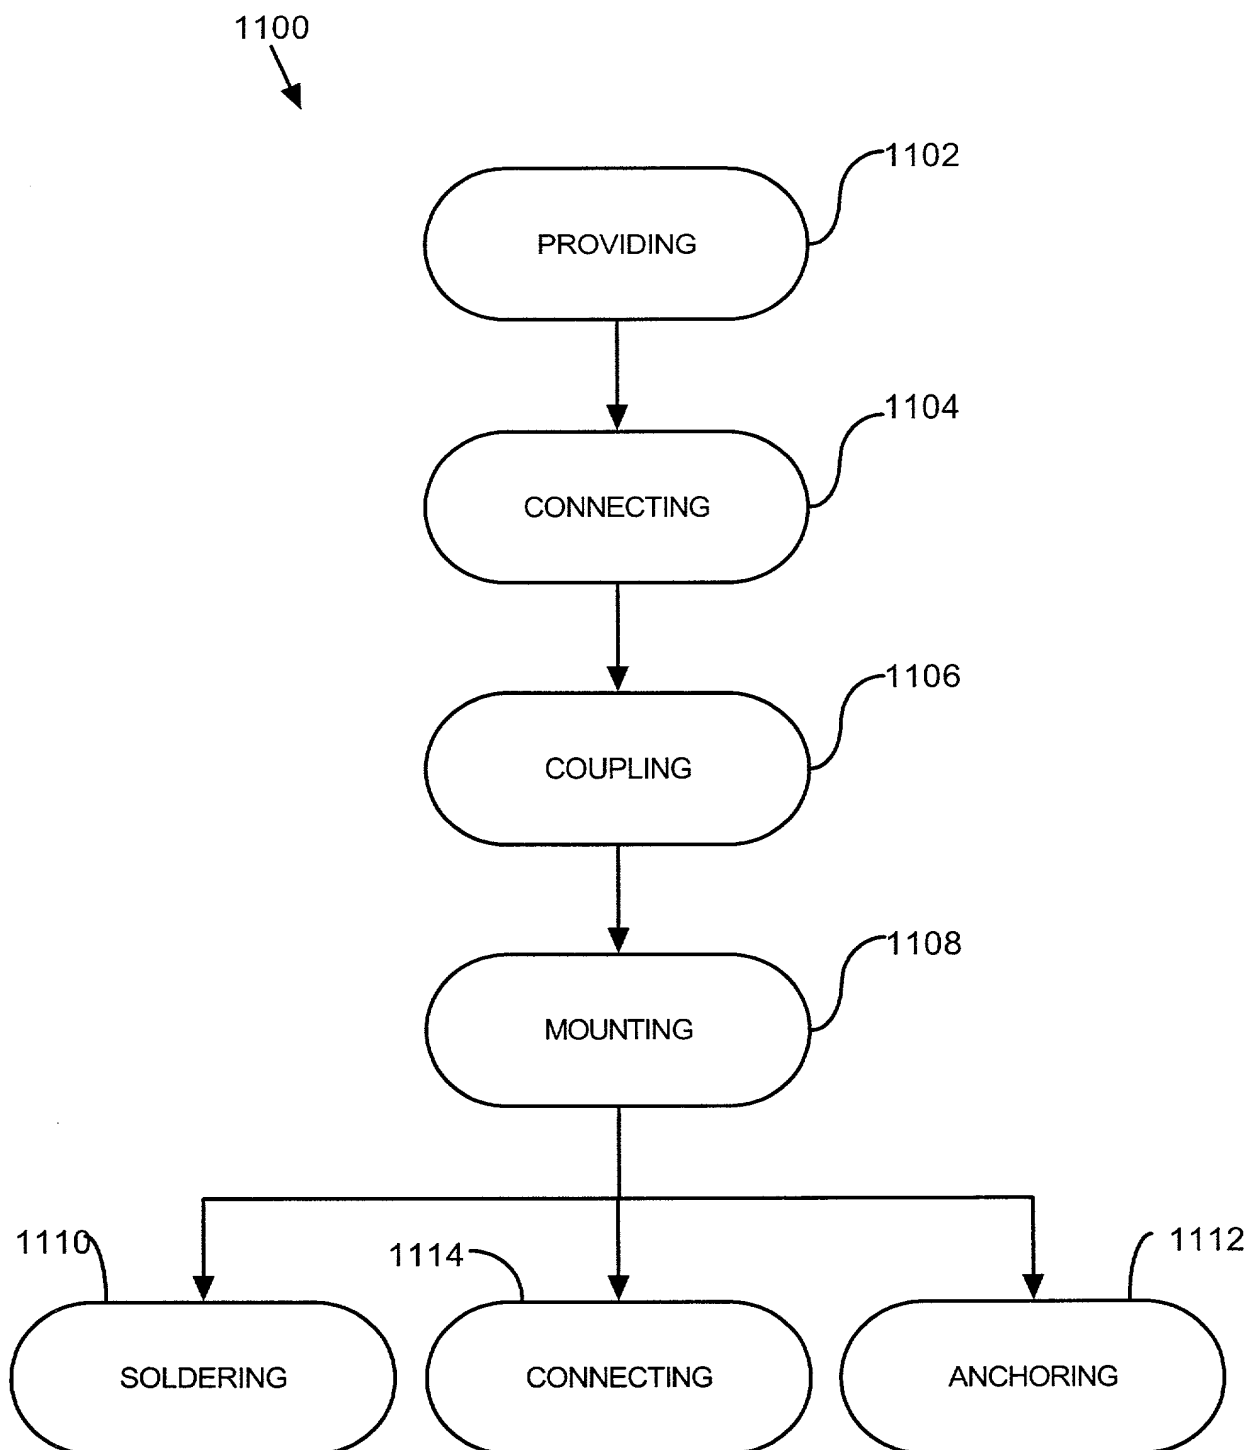


FIG. 11

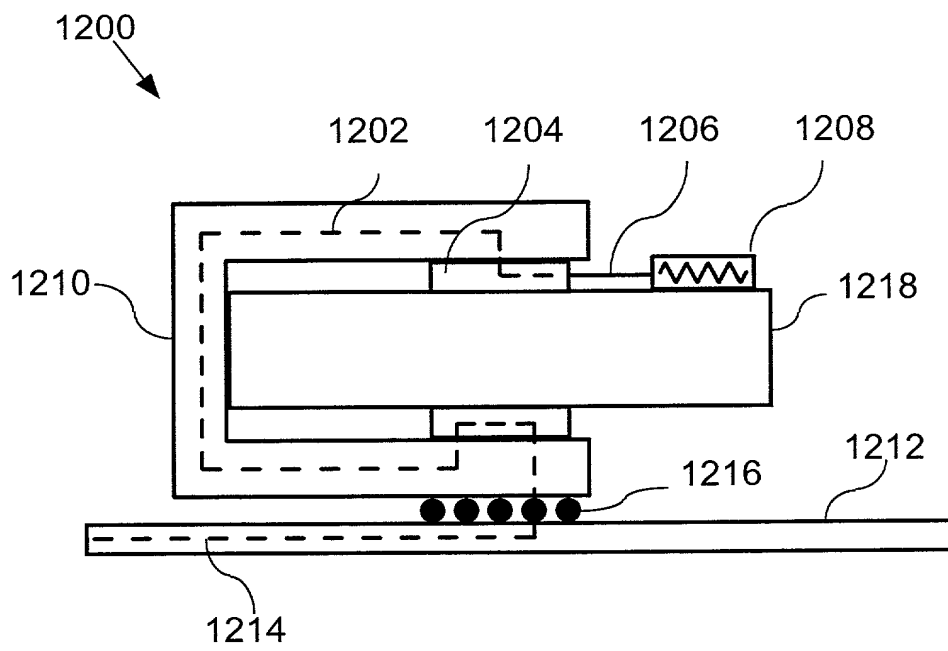


FIG. 12

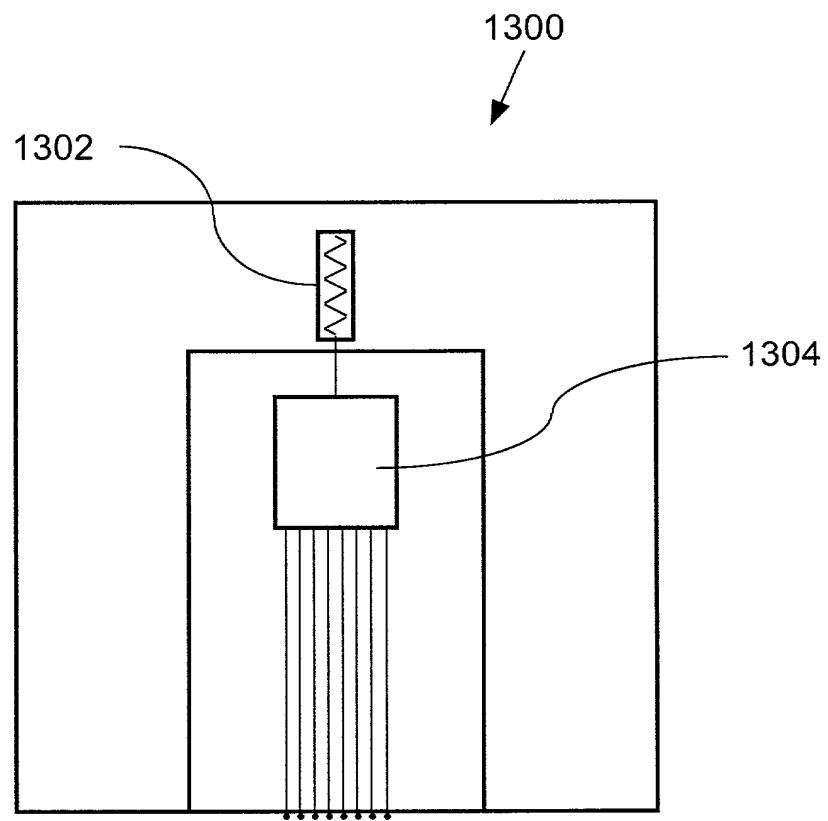


FIG. 13

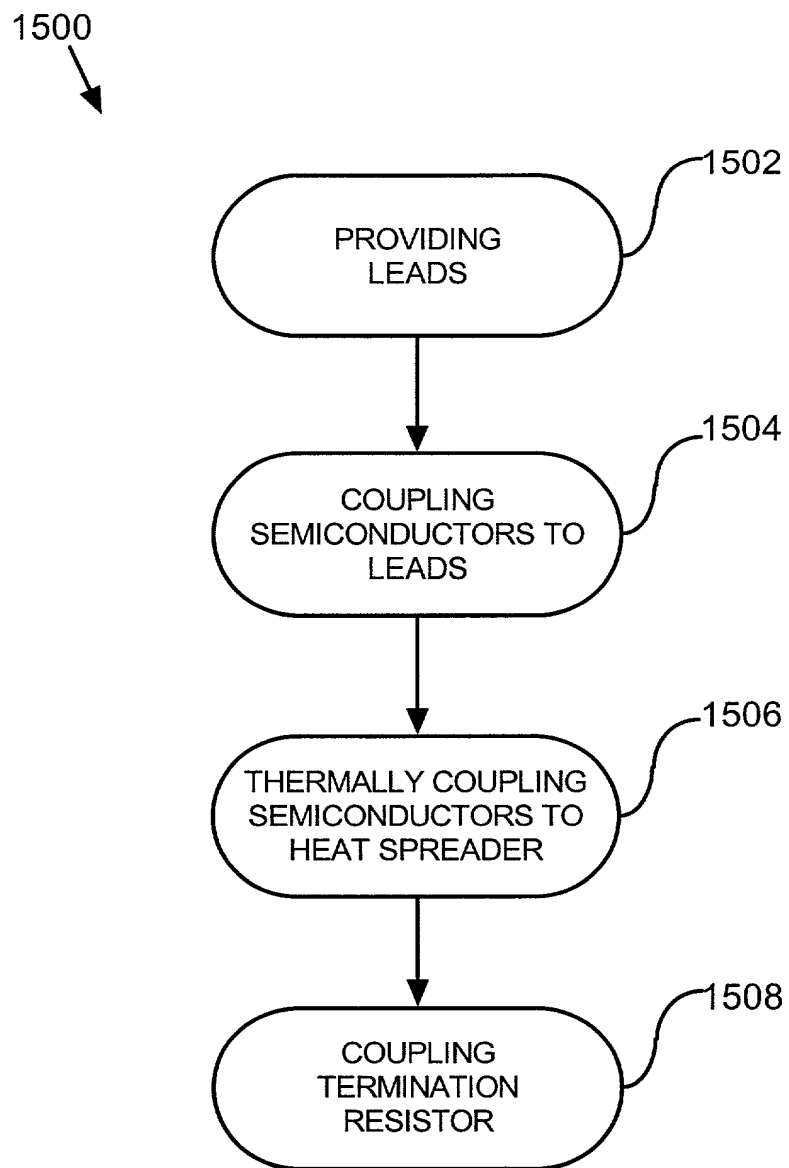


FIG. 15